



# SAFEGUARDING ON TOP OF TRUST

YOUR PROTECTION AT WORK

EDITION 2021-2022



**Dino Safety Product Co.,Ltd.**


96/41, Moo 6, Laharn, Bangbuathong Nonthaburi 11110, Thailand

Telephone: 081-4945405

E-mail: [admin@dinosafety.asia](mailto:admin@dinosafety.asia)




EN361	Personal protective equipment against falls from a height-Full body harness.
EN358	Personal protective equipment for work positioning and prevention of falls from a height-Belts for work positioning and restraint and work positioning lanyards.
EN813	Personal fall protection equipments-sit harness.
EN355	Personal protective equipment against falls from a height-Energy absorbers.
EN354	Personal protective equipment against falls from a height-lanyards.
EN353-2	Personal protective equipment against falls from a height-Part2:Guided type fall arresters including a flexible anchor line.
EN795	Personal fall protection equipment-Anchor devices.
EN1891	Personal protective equipment for the prevention of falls from a height-Low stretch kernmantel ropes.
EN892	Mountaineering equipment-Dynamic mountaineering ropes-Safety requirements and test methods.
EN564	Mountaineering equipment-Accessory cords.
EN360	Personal protective equipment against falls from a height-Retractable type fall arresters.
EN12841	Personal fall protection equipment-Rope access systems-Rope adjustment devices.
EN12278	Mountaineering equipment-Pulleys-Safety requirements and test methods.
EN362	Personal protective equipment against falls from a height-Connectors.




**Restraint System**

A restraint system prevents a worker from reaching areas where there is a risk of falls. It's not intended to absorb falls.



**Work Position System**

The work position systems are intended for work positioning or for restraint to prevent the operator from reaching hazardous areas.



**Fall Arrest Systems**

A fall arrest system is intended to reduce the impact force on the user in case of fall. It's made of an anchor point, a full body harness and a connecting fall arrest sub system.



**Rope access systems**
















Rope access systems allow the user by leaning into the system or hanging in the system to get to the work position and therefore determine that a free fall is prevented or delayed.




**Rescue system**

A rescue system intended for self rescue or to rescue an operator in case of a fall.

# CONTENT

-  **Harness** ..... 5-19
-  **Energy absorber with webbing or lanyards** ..... 20-28
-  **Work positioning ropes and vertical anchorage line system** ..... 29-34
-  **Rope** ..... 40-49
-  **Rescue descent** ..... 40-49
-  **Fall arrester devices** ..... 50-57
-  **Rescue tripod** ..... 58-60
-  **Anchor devices** ..... 61
-  **Ascenders, descenders and belay devices** ..... 62-65
-  **Pulleys** ..... 66
-  **Connectors** ..... 67-72
-  **Helmets** ..... 73
-  **Gloves** ..... 74
-  **Set** ..... 75-76
-  **Rescue stretcher** ..... 77-78

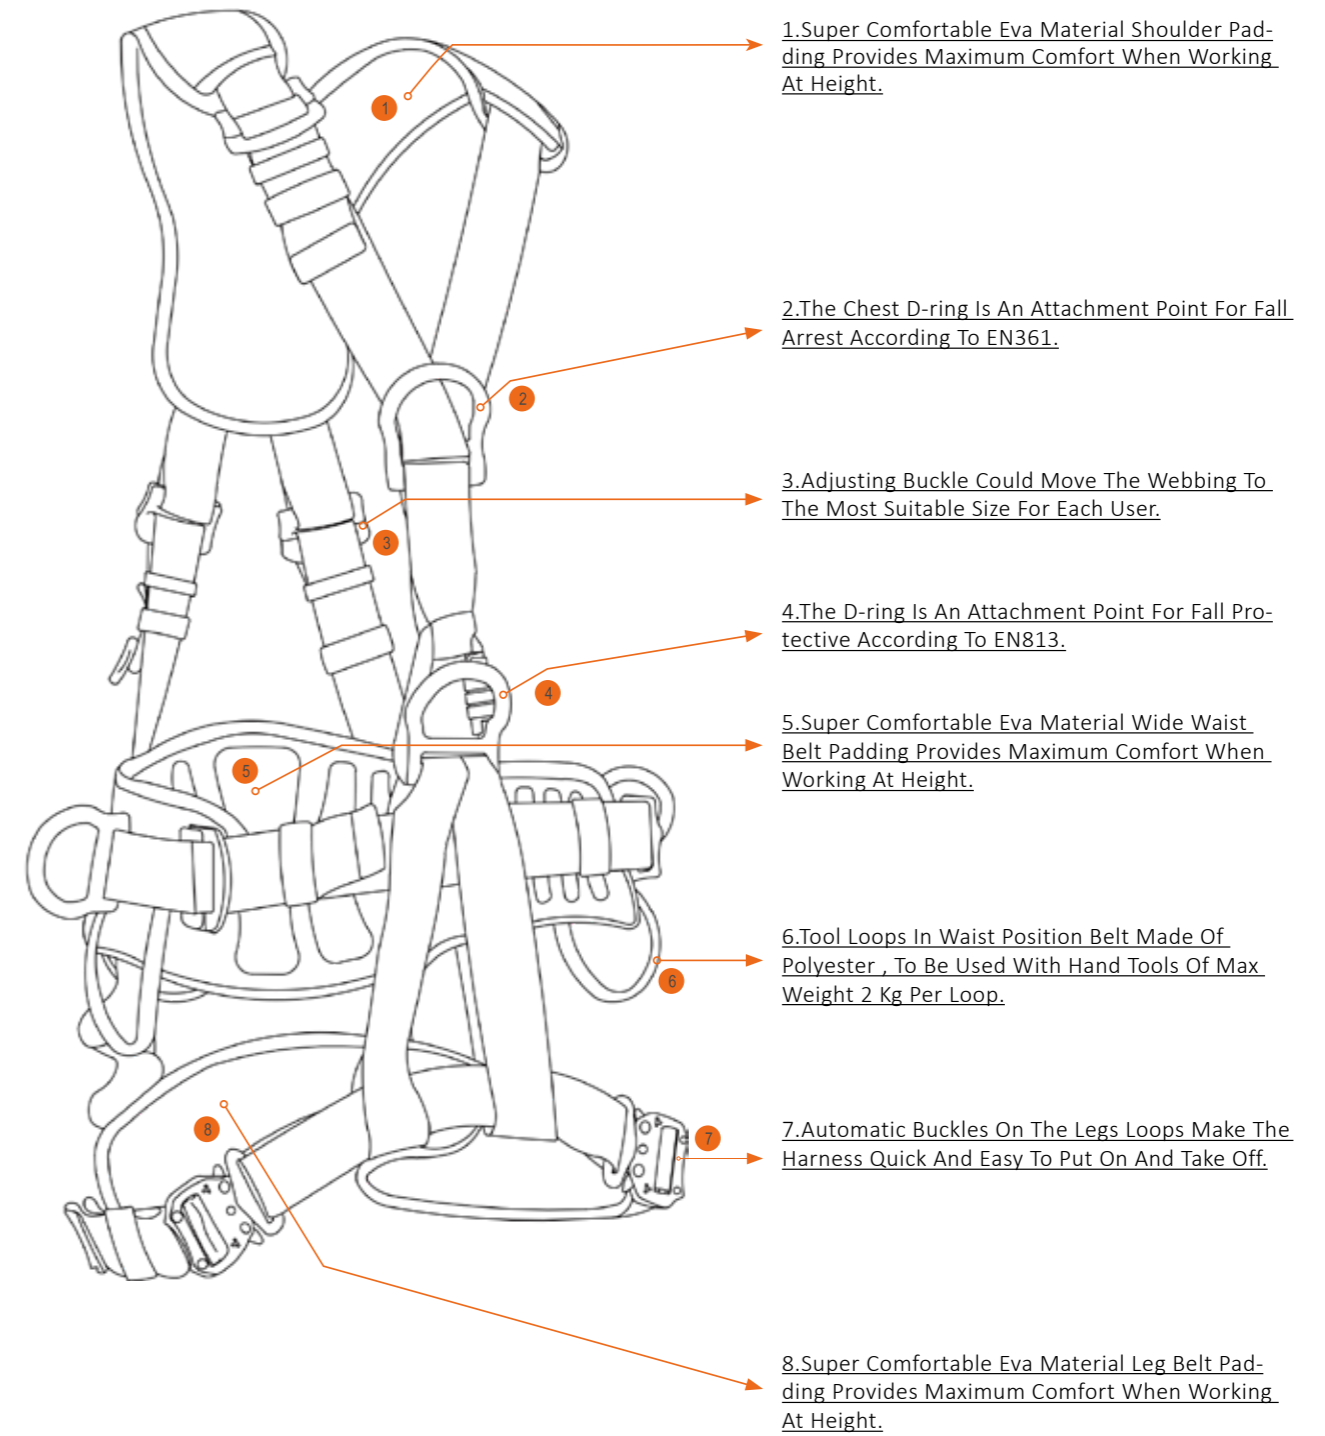



HT-331QR



HT-331



HT-327



HT-328



HT-316QR



HT-316Y



HT-316T



HT-321



HT-320



HT-319



HT-315



HT-318



HT-317



HT-336



HT-311



HT-339Y



HT-339



HT-721





### HT-331QR

#### Fall arrest and work positioning and sit harness

- Full body harness with 2 attachment points for fall arrest :1 sternal aluminum D-ring and 1 dorsal aluminum D-ring according to EN361,2 side aluminum D-ring for work position according to EN358, 1 ventral aluminum D-ring according to EN813.
- Full body harness have 9 pcs steel adjustable buckles and 1 pcs steel oval ring and 1 pcs aluminum ascender and 1 steel carabiner.
- Super comfortable EVA material waist padding belt, shoulder padding and leg padding provides maximum comfort when working at height.
- Open the ventral carabiner and back steel buckle remove the shoulder strap could make a sit harness.
- 4 pcs tool loop in waist position belt made of polyester, maximum load capacity per loop 2 kg.

REF.	Size	Legs	Waist	Height	CE		
		cm	cm	cm	EN 358	EN 361	EN 813
HT-331QR	M-L	45-65	70-110	170-185	✓	✓	✓
	XL-XXL	60-75	80-130	180-195	✓	✓	✓



### HT-331

#### Fall arrest and work positioning and sit harness

- Full body harness with 2 attachment points for fall arrest :1 sternal aluminum D-ring and 1 dorsal aluminum D-ring according to EN361,2 side aluminum D-ring for work position according to EN358, 1 ventral aluminum D-ring according to EN813.
- Full body harness with 9 pcs steel adjustable buckles,1 aluminum carabiner and 1 pcs steel oval ring.
- Super comfortable EVA material waist padding belt, shoulder padding and leg padding provides maximum comfort when working at height.
- Open the ventral carabiner and back steel buckle remove the shoulder strap could make a sit harness.
- 4 pcs tool loop in waist position belt made of polyester, maximum load capacity per loop 2 kg.

REF.	Size	Legs	Waist	Height	CE		
		cm	cm	cm	EN 358	EN 361	EN 813
HT-331	M-L	45-65	70-110	170-185	✓	✓	✓
	XL-XXL	60-75	80-130	180-195	✓	✓	✓




### HT-327

#### Fall arrest and work positioning and sit harness

- Full body harness with 2 attachment points for fall arrest :1 sternal aluminum D-ring and 1 dorsal aluminum D-ring according to EN361, 2 side aluminum D-ring for work position according to EN358, 1 ventral aluminum D-ring according to EN813.
- Full body harness with 7 pcs steel adjustable buckles and 1 ventral aluminum carabiner.
- Super comfortable EVA material waist padding belt, shoulder padding and leg padding provides maximum comfort when working at height.
- 2 pcs tool loop in waist position belt made of polyester, maximum load capacity per loop 2 kg.

REF.	Size	Legs	Waist	Height	CE		
		cm	cm	cm	EN 358	EN 361	EN 813
HT-327	M-L	45-65	70-110	170-185	✓	✓	✓
	XL-XXL	60-75	80-130	180-195	✓	✓	✓

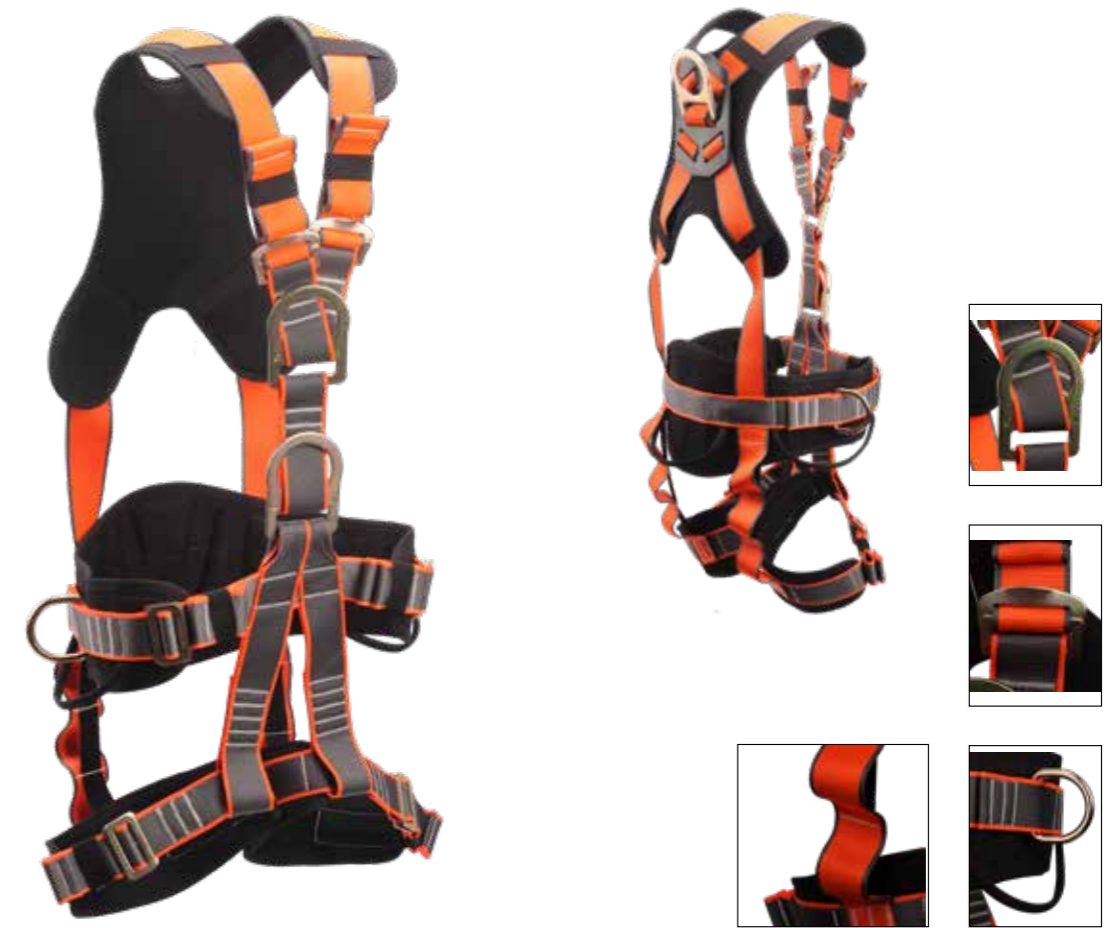

### HT-328

#### Fall arrest and work positioning and sit harness

- Full body harness with 2 attachment points for fall arrest :1 sternal steel D-ring and 1 dorsal steel D-ring according to EN361, 2 side steel D-ring for work position according to EN358, 1 ventral steel D-ring according to EN813.
- Full body harness with 6 pcs steel adjustable buckles.
- Super comfortable EVA material waist padding belt, shoulder padding and leg padding provides maximum comfort when working at height.
- 2 pcs tool loop in waist position belt made of polyester, maximum load capacity per loop 2 kg.

REF.	Size	Legs	Waist	Height	CE		
		cm	cm	cm	EN 358	EN 361	EN 813
HT-328	M-L	45-65	70-110	170-185	✓	✓	✓
	XL-XXL	60-75	80-130	180-195	✓	✓	✓





### HT-316QR

#### Full arrest and work positioning harness

- Full body harness with 2 attachment points for fall arrest :sternal double textile loops and 1 dorsal steel D-ring according to EN361, 2 side steel D-ring for work position according to EN358.
- Full body harness with 2 pcs steel adjustable buckles on the shoulder straps , 4 pcs steel quick buckles on chest straps ,waist straps and legs loop.
- Super comfortable EVA material shoulder padding,waist padding belt and leg padding provides maximum comfort when working at height.
- 2 pcs tool loop in waist position belt made of polyester, maximum load capacity per loop 2 kg.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN358	EN361
HT-316QR	UNI SIZE	45-65	70-95	170-185	✓	✓



### HT-316Y

#### Fall arrest harness

- Full body harness with 2 attachment points for fall arrest : sternal double textile loop and 1 dorsal steel D-ring according to EN361.
- Full body harness with 2 pcs steel adjustable buckles on the shoulder straps ,3pcs steel quick buckles on chest straps and legs loop.
- Super comfortable EVA material shoulder padding and leg padding provides maximum comfort when working at height.

REF.	Size	Legs	Waist	Height	CE
		cm	cm	cm	EN361
HT-316Y	UNI SIZE	45-65	/	170-185	✓





### HT-316T

#### Fall arrest harness

- Full body harness with 2 attachment points for fall arrest : sternal double textile loop and 1 dorsal steel D-ring according to EN361.
- Full body harness with 2 pcs steel adjustable buckles on the shoulder straps ,3pcs steel quick buckles on chest straps and legs loop.
- Super comfortable EVA material shoulder padding provides maximum comfort when working at height.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN 358	EN 361
HT-316T	UNI SIZE	45-65	/	170-185	✓	



### HT-321

#### Fall arrest and work positioning harness

- Full body harness with 3 attachment points for fall arrest :sternal double textile loop and 1 dorsal steel D-ring according to EN361, 2 side steel D-ring for work position according to EN358.
- Full body harness with 6 pcs steel adjustable buckles on the shoulder straps , chest straps ,waist straps and legs loop.
- Super comfortable EVA material waist padding belt provides maximum comfort when working at height.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN 358	EN 361
HT-321	UNI SIZE	45-65	70-95	170-185	✓	✓



### HT-320

#### Fall arrest and work positioning harness

- Full body harness with 3 attachment points for fall arrest :2 front steel D-ring and 1 dorsal steel D-ring according to EN361, 2 side steel D-ring for work position according to EN358.
- Full body harness with 6 pcs steel adjustable buckles on the shoulder straps , chest straps ,waist straps and legs loop.
- Super comfortable EVA material waist padding belt provides maximum comfort when working at height.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN 358	EN 361
HT-320	UNI SIZE	45-65	70-95	170-185	✓	✓



### HT-319

#### Fall arrest and work positioning harness

- Full body harness with 1 attachment points for fall arrest :1 dorsal steel D-ring according to EN361, 2 side steel D-ring for work position according to EN358.
- Full body harness with 4 pcs steel adjustable buckles on the chest straps ,waist straps and legs loop.
- Super comfortable EVA material waist padding belt provides maximum comfort when working at height.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN 358	EN 361
HT-319	UNI SIZE	45-65	70-95	170-185	✓	✓







**HT-315**  
Fall arrest harness

- Full body harness with 2 attachment points for fall arrest : sternal double textile loop and 1 dorsal steel D-ring according to EN361.
- Full body harness with 5 pcs steel adjustable buckles on the shoulder straps , chest straps and legs loop.

REF.	Size	Legs	Waist	Height	CE
		cm	cm	cm	EN361
HT-315	UNI SIZE	45-65	/	170-185	✓



**HT-318**  
Fall arrest harness

- Full body harness with 3 attachment points for fall arrest :2 front steel D-ring and 1 dorsal steel D-ring according to EN361.
- Full body harness with 5 pcs steel adjustable buckles on the shoulder straps , chest straps and legs loop.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN358	EN361
HT-318	UNI SIZE	45-65	/	170-185	✓	✓



**HT-317**  
Fall arrest harness

- Full body harness with 2 attachment points for fall arrest :1 sternal steel D-ring and 1 dorsal steel D-ring according to EN361.
- Full body harness with 5 pcs steel adjustable buckles on the shoulder straps , chest straps and legs loop.

REF.	Size	Legs	Waist	Height	CE
		cm	cm	cm	EN361
HT-317	UNI SIZE	45-65	/	170-185	✓



**HT-336**  
Fall arrest harness

- Full body harness with 1 attachment points for fall arrest :1 dorsal steel D-ring according to EN361.
- Full body harness with 5 pcs steel adjustable buckles on the chest straps, shoulder straps and legs loop.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN358	EN361
HT-336	UNI SIZE	45-65	70-95	170-185	✓	✓





**HT-311**  
Fall arrest harness

- Full body harness with 1 attachment points for fall arrest :1 dorsal steel D-ring according to EN361.
- Full body harness with 3 pcs steel adjustable buckles on the chest straps and legs loop.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN361	
HT-311	UNI SIZE	45-65	/	170-185	✓	

**HT-339Y**  
Harness

- This harness must need use together with sit harness. it can't be use alone.
- The harness with 2 attachment points for fall arrest :1 sternal aluminum D-ring and 1 dorsal aluminum D-ring according to EN361.
- The harness with 3 pcs steel adjustable buckles.



**HT-339**  
Sit harness

- Sit harness with 2 side aluminum D-ring for work position according to EN358, 1 ventral aluminum D-ring according to EN813
- Sit harness with 6 pcs steel adjustable buckles and 1 pcs steel oval ring.
- 4 Pcs tool loops for hang tools, maximum load capacity per loop 2 kg.

REF.	Size	Legs	Waist	Height	CE	
		cm	cm	cm	EN 358	EN 813
HT-339	M-L	45-65	70-110	170-185	✓	✓
	XL-XXL	60-75	80-130	180-195	✓	✓

**HT-721**  
Work Position Seat

Intended for use with our fall arrest or work positioning harnesses, inside padding is made of aluminium which allows long term use without any deformation, wider sitting area ensure good stability and allows comfortable suspension as well as standing at work positioning, 2 d-rings (bearing capacity 50kg) for bucket or other gear suspension.






## Anti-fall system for high-hanging


In areas where there is a risk of falling, use a fall prevention system to prevent people from falling. Fall prevention systems are usually required to be used as high as possible to reduce the fall coefficient, thereby reducing the impact force received by the user during a fall. The connection device used in the fall protection system must be equipped with an energy absorber to ensure that the impact force on the user is less than 6kn when a fall occurs.

$$F = mg + mg \sqrt{1 + \frac{2fk}{mg}}$$


- F: First impact (N)
- m: Object weight (kg)
- g: Acceleration of gravity
- f: Actual fall coefficient
- k: Young's modulus of rope X braided part

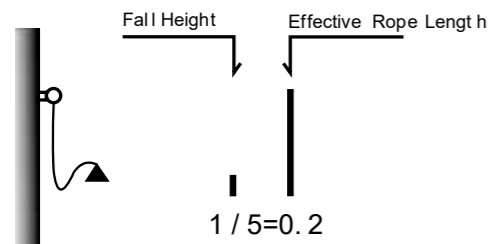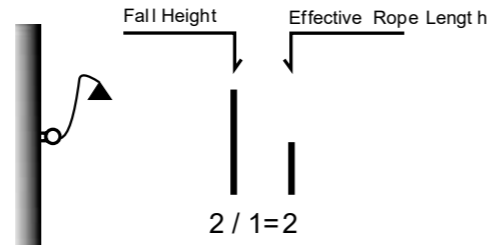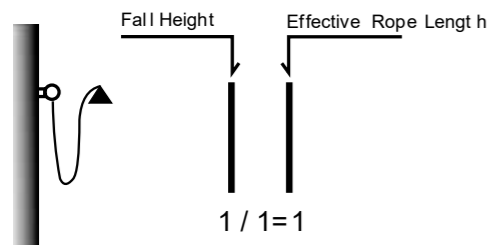

How to calculate Total Fall Distance

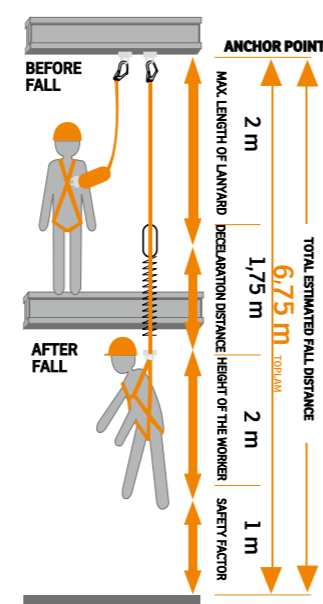

The energy absorber with lanyard is a component of personal fall arrest equipment and complies with EN355. Fall arrest system consisted of energy absorber with lanyard, attached to the full body harness (complied with EN 361) and connected to the structural anchor point (complied with EN 795) can be used as a basic personal protective equipment against falls from a height. Caution: The total length of the energy absorber with lanyard including terminations and connectors shall not exceed 2m.

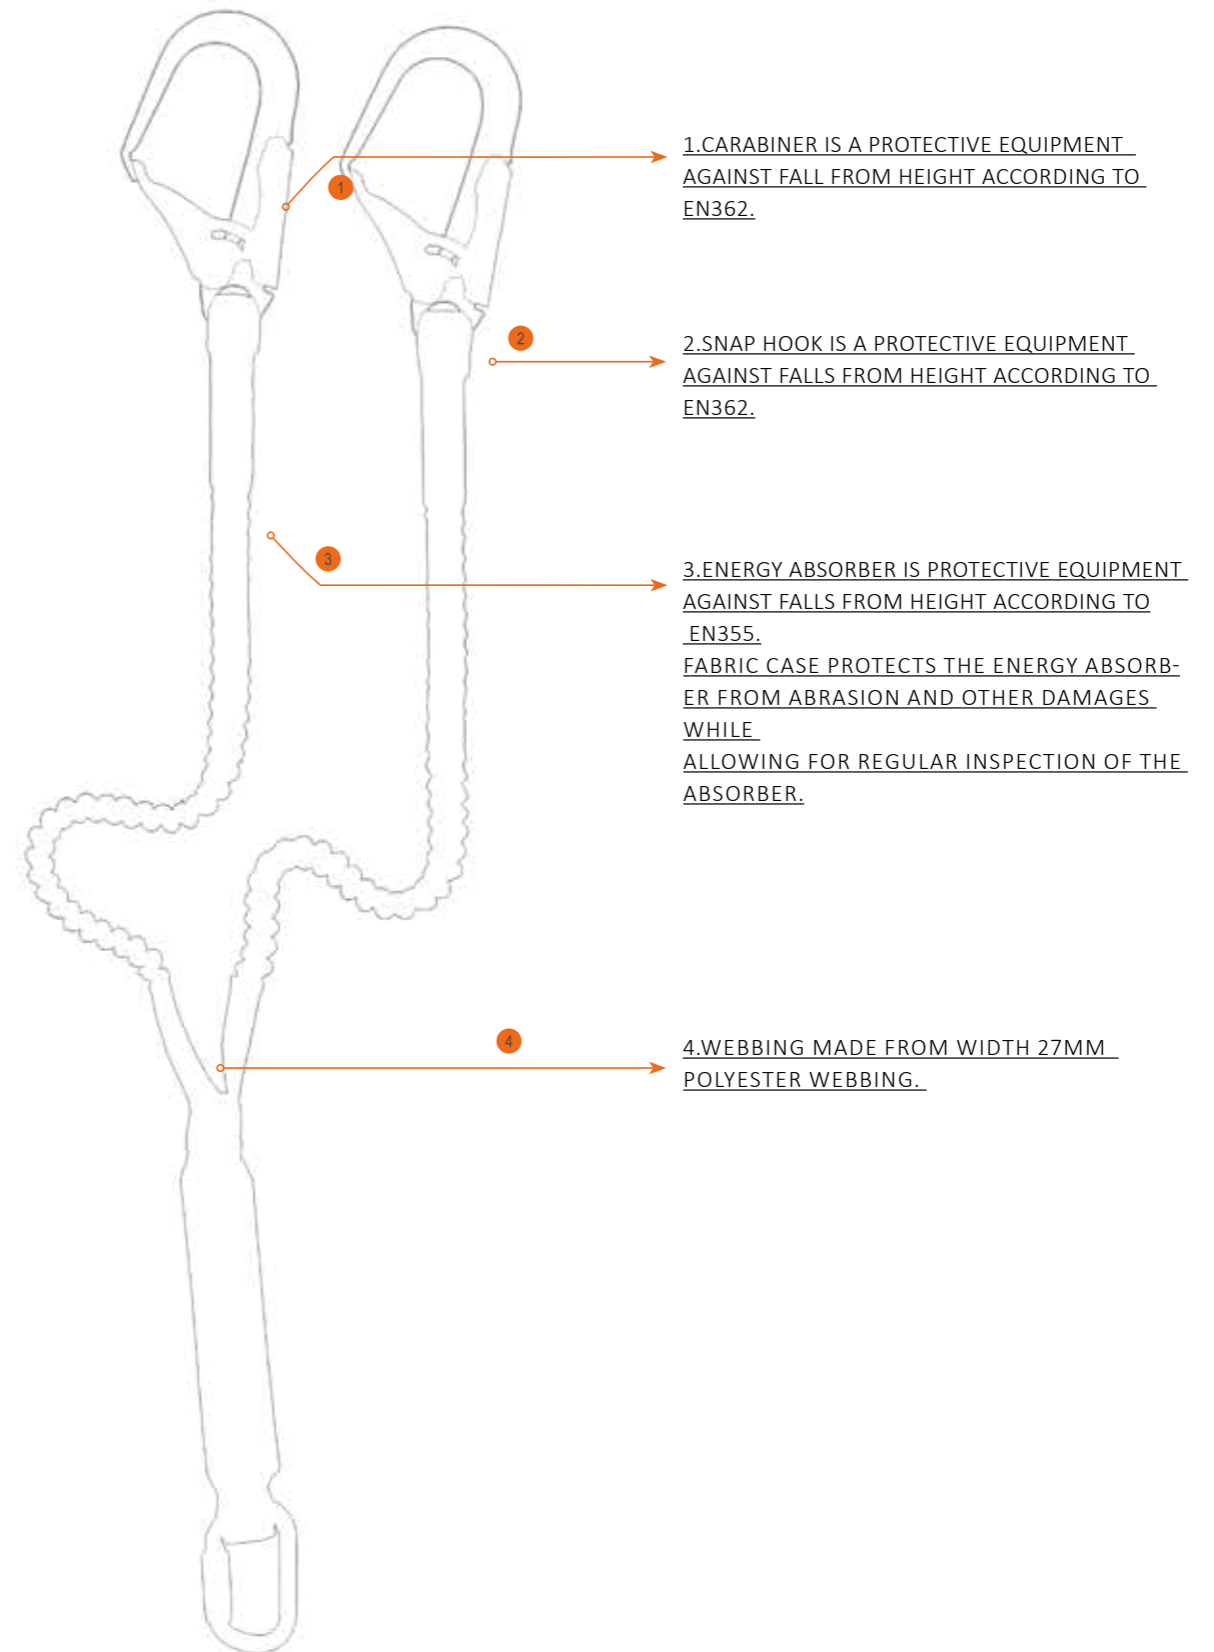



HT-509YL



HT-509L



HT-507Y



HT-507



HT-515YL



HT-515L



HT-516YL



HT-516L



HT-512YL



HT-512L



HT-511YL



HT-511L



### HT-509YL

#### Energy absorber with twin lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of high tenacity 11mm static rope.
- Twin lanyard allows user to keep one big aluminum hook attached to the anchorage while the other big aluminum hook is always ready to be hooked to the next anchorage.The aluminum carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Rope Material	Rope Dia	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-509YL	Polyamide	11mm	HT-R05	HT-X05	1.8m	✓	✓



### HT-509L

#### Energy absorber with single leg lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of high tenacity 11mm static rope.
- One big aluminum hook attach to an anchorage point and remain safe during their work.The aluminum carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Rope Material	Rope Dia	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-509L	Polyamide	11mm	HT-R05	HT-X05	1.8m	✓	✓





### HT-507Y

#### Energy absorber with twin lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of high tenacity 11mm static rope.
- Twin lanyard allows user to keep one steel hook attached to the anchorage while the other steel hook is always ready to be hooked to the next anchorage.The steel carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Rope Material	Rope Dia	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-507Y	Polyamide	11mm	HT-R02	HT-H03	1.8m	✓	✓




### HT-507

#### Energy absorber with single leg lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of high tenacity 11mm static rope.
- One steel hook attach to an anchorage point and remain safe during their work. The steel carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Rope Material	Rope Dia	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-507	Polyamide	11mm	HT-R02	HT-H03	1.8m	✓	✓

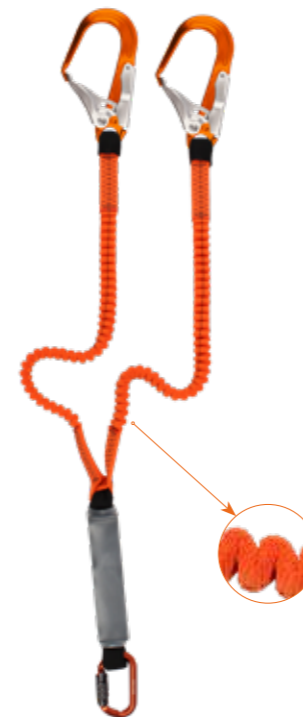

### HT-515YL

#### Energy absorber with twin elastic lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of highly resistant 28mm polyester elastic webbing.
- Twin elastic lanyard allows user to keep one big aluminum hook attached to the anchorage while the other big aluminum hook is always ready to be hooked to the next anchorage.The aluminum carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Webbing Material	Webbing Width	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-515YL	Polyamide	27mm	HT-R05	HT-X05	1.4-1.8m	✓	✓



### HT-515L

#### Energy absorber with single elastic lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of highly resistant 28mm polyester elastic webbing.
- One big aluminum hook attach to an anchorage point and remain safe during their work.The aluminum carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Webbing Material	Webbing Width	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-515L	Polyester	27mm	HT-R05	HT-X05	1.4-1.8m	✓	✓



### HT-516YL

#### Energy absorber with twin elastic lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of highly resistant 28mm polyester elastic webbing.
- Twin elastic lanyard allows user to keep one big steel hook attached to the anchorage while the other big steel hook is always ready to be hooked to the next anchorage.The steel carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Webbing Material	Webbing Width	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-516YL	Polyester	27mm	HT-R02	HT-H03	1.4-1.8m	✓	✓



### HT-516L

#### Energy absorber with single elastic lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of highly resistant 28mm polyester elastic webbing.
- One big steel hook attach to an anchorage point and remain safe during their work.The steel carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Rope Material	Rope Dia	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-516L	Polyester	27mm	HT-R02	HT-H03	1.4-1.8m	✓	✓



### HT-512YL

#### Energy absorber with twin lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of highly resistant 30mm polyester webbing.
- Twin lanyard allows user to keep one big aluminum hook attached to the anchorage while the other big aluminum hook is always ready to be hooked to the next anchorage.The aluminum carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Webbing Material	Webbing Width	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-512YL	Polyester	30mm	HT-R05	HT-X05	1.8m	✓	✓



### HT-512L

#### Energy absorber with twin lanyard

- Energy absorber made from 44mm width polyester webbing.
- Made of highly resistant 30mm polyester webbing.
- Twin lanyard allows user to keep one big steel hook attached to the anchorage while the other big steel hook is always ready to be hooked to the next anchorage.The steel carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Webbing Material	Webbing Width	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-512L	Polyester	30mm	HT-R05	HT-X05	1.8m	✓	✓





**HT-511YL**

**Energy absorber with twin lanyard**

- Energy absorber made from 44mm width polyester webbing.
- Made of highly resistant 30mm polyester webbing.
- Twin lanyard allows user to keep one big steel hook attached to the anchorage while the other big steel hook is always ready to be hooked to the next anchorage. The steel carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Webbing Material	Webbing Width	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-511YL	Polyester	30mm	HT-R02	HT-H03	1.8m	✓	✓



**HT-511L**

**Energy absorber with single lanyard**

- Energy absorber made from 44mm width polyester webbing.
- Made of highly resistant 30mm polyester webbing.
- One big steel hook attach to an anchorage point and remain safe during their work. The steel carabiner attach to harness.
- Built-in energy absorber limits the fall arrest force in a fall situation by tearing specific seams.
- Absorber fabric case protects the energy absorber from abrasion and other damages while allowing for regular inspection of the absorber.

REF.	Webbing Material	Webbing Width	Carabiner	Hook	Length	CE	
						EN355	EN362
HT-511L	Polyester	30mm	HT-R02	HT-H03	1.8m	✓	✓



HT-607



HT-607Y



HT-608L



HT-608Y



HT-621



HT-616



HT-613LR



HT-613



HT-612L




HT-612



HT-615




HT-623

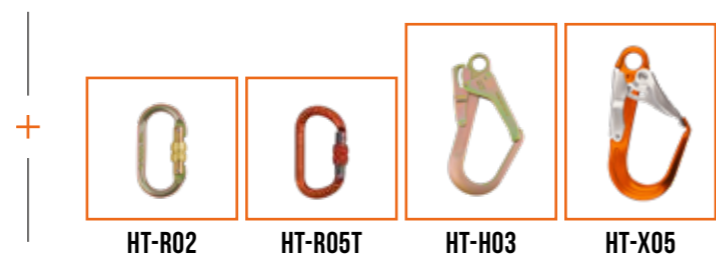

**Work position single/ double lanyard**

- Single and double (Y-type) connection lanyards, ranging in length from 1m to 1.5m;
  - Made of 11mm high wear-resistant static rope;
  - You can choose the connector you need, like:
  - Equipped with a steel carabiner or aluminum carabiner;
  - Equipped with steel or aluminum hook;
- For any other specific length, contact us.

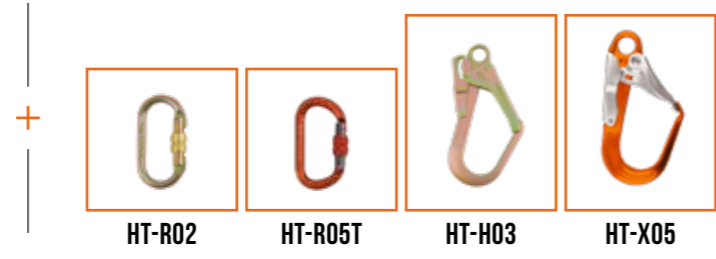

**Work position single/ double lanyard**

- Single and double (Y-type) connection lanyards, ranging in length from 1m to 1.5m;
  - Made of highly resistant 28mm polyester elastic webbing;
  - You can choose the connector you need, like:
  - Equipped with a steel carabiner or aluminum carabiner;
  - Equipped with steel or aluminum hook;
- For any other specific length, contact us.



**HT-621**

**Double leg positioning lanyard**

A double progression lanyard that allows continuous connection during rope ascents. The plastic sheaths hold the carabiners in position and facilitate clipping while protecting the terminations from abrasion. It has a 65cm long arm and a 35cm short arm.

REF.	Rope Material	Rope Dia	Rope Length	Strength	CE
					EN354
HT-621	Polyamide	12mm	0.35/0.65m	22kN	✓



**HT-616**

**Rope grab**

- Rope grab use lanyard connect with steel middle hook.
- It's easy for user to connect with full body harness.





### HT-613LR

#### Work position rope lanyard with aluminum rope grab

- Aluminum rope grab adjuster for a progressive movement.
- Sewing protected with a plastic transparent sleeve which not only protects the end, but also make the stitches visible for easy inspection before the use.
- Abrasion resistant thimble to protect the loops from being damaged by metallic contact.

Rope Material	Rope Dia	Rope Length	Rope Grab Material	Hook	Carabiner	CE	
						EN358	EN362
Polyamide	12mm	1.5-2.0 M	Aluminum	HT-H18	HT-R05	✓	✓



### HT-613

#### Work position rope lanyard with aluminum rope grab

- Aluminum rope grab adjuster for a progressive movement.
- Sewing protected with a plastic transparent sleeve which not only protects the end, but also make the stitches visible for easy inspection before the use.
- Abrasion resistant thimble to protect the loops from being damaged by metallic contact.

Rope Material	Rope Dia	Rope Length	Rope Grab Material	Hook	Carabiner	CE	
						EN358	EN362
Polyamide	12mm	1.5-2.0 M	Aluminum	HT-H18	HT-R05	✓	✓



### HT-612L

#### Work position rope lanyard with aluminum rope grab

- Aluminum rope grab adjuster for a progressive movement.
- Sewing protected with a plastic transparent sleeve which not only protects the end, but also make the stitches visible for easy inspection before the use.
- Abrasion resistant thimble to protect the loops from being damaged by metallic contact.

Rope Material	Rope Dia	Rope Length	Rope Grab Material	Hook	Carabiner	CE	
						EN358	EN362
Polyamide	12mm	1.5-2.0 M	Aluminum	HT-H03	HT-R02	✓	✓



### HT-612

#### Work position rope lanyard with aluminum rope grab

- Aluminum rope grab adjuster for a progressive movement.
- Sewing protected with a plastic transparent sleeve which not only protects the end, but also make the stitches visible for easy inspection before the use.
- Abrasion resistant thimble to protect the loops from being damaged by metallic contact.

Rope Material	Rope Dia	Rope Length	Rope Grab Material	Hook	Carabiner	CE	
						EN358	EN362
Polyamide	12mm	1.5-2.0 M	Aluminum	HT-H14	HT-R02	✓	✓





**HT-615**  
Flexible anchor line

•The product accompanies the user when climbing up and down and in the event of a fall it blocks the rope and catches the user safely.

Rope Material	Rope Dia	Rope Length	Rope Grap Material	Hook	Carabiner	CE	
						EN353-2	EN362
Polyamide	12mm	5-20m	Aluminum	HT-H18	HT-R05	✓	✓

**HT-623**  
Flexible anchor line

•Construction  
The flexible anchor line consist of a polyamide rope in different diameters. The design of the rope ends are finished off by stitching,which are protected by a plastic sleeves.

•Function  
The flexible anchor line is the basis for the fall arrester with self-locking function. The guide type fall arrester runs alongside the anchor line (rope), follows the user while moving up or down and locks automatically on the anchor line. The possible fall height results form the length of the lanyard between the fall arrester and the full body harness. Generally, the shorter the lanyard, the shorter the fall distance.



Product	Rope Dia	Rope Length	ART NO.
Polyamide Kernmantle rope	10.5mm	15m	HT-62315
		20m	HT-62320
		30m	HT-62330
		40m	HT-62350



HT-D07



HT-D09



HT-D10



HT-MD10



HT-MD15



HT-718L



HT-718



HT-719



HT-722



HT-720




HT-MD08



### Sewn sling

- Made of high-strength nylon fiber;
  - Super wear resistance, color identification of sewing thread in
  - different lengths;
- Used to set simple temporary fixed points


Art.No	Material	Width	Color	Length	Strength	CE
HT-D07-60	Nylonfabric	25mm	Orange	60cm	22kN	EN795
HT-D07-80	Nylonfabric	25mm	Red	80cm	22kN	
HT-D07-120	Nylonfabric	25mm	Grey	120cm	22kN	
HT-D07-150	Nylonfabric	25mm	Green	150cm	22kN	

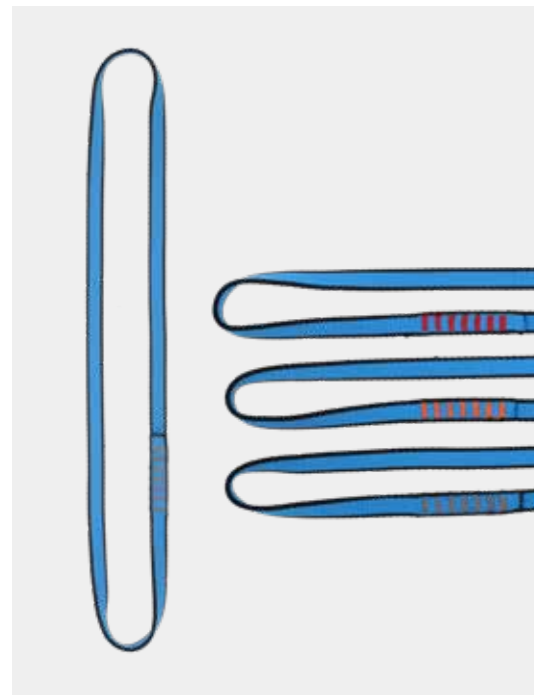

### Sewn sling

- Made of high-strength nylon fiber;
  - Super wear resistance, color identification of sewing thread in
  - different lengths;
- Used to set simple temporary fixed points

Art.No	Material	Width	Color	Length	Strength	CE
HT-D09-60	Nylonfabric	16mm	Orange	60cm	22kN	EN795
HT-D09-80	Nylonfabric	16mm	Red	80cm	22kN	
HT-D09-120	Nylonfabric	16mm	Grey	120cm	22kN	
HT-D09-150	Nylonfabric	16mm	Green	150cm	22kN	

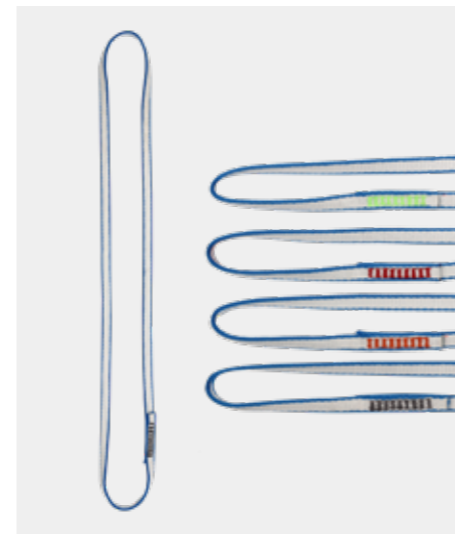

### Sewn sling

- Made of high-strength Dyneema fiber;
  - Super wear resistance, color identification of sewing thread in
  - different lengths;
- Used to set simple temporary fixed points

Art.No	Material	Width	Color	Length	Strength	CE
HT-D10-60	Dyneema	11mm	Orange	60cm	22kN	EN795
HT-D10-80	Dyneema	11mm	Red	80cm	22kN	
HT-D10-120	Dyneema	11mm	Grey	120cm	22kN	
HT-D10-150	Dyneema	11mm	Green	150cm	22kN	

### HT-MD10

#### Anchoring strap with 2 steel ring

- Made of high-strength polyester fiber;
- Two forged steel connection points are provided at both ends of anchor point flat belt



Art.No	Webbing Width	Length	D-ring Material	Strength	CE
MD-108	44mm	1m	Steel	22kN	EN795
MD10-150	44mm	1.5m	Steel	22kN	

### HT-MD15

#### Cable anchor sling

- Braided with high-strength stainless steel;
- This anchor point is resistant to cutting and abrasion;
- The plastic hose can keep the buckle in the correct position at any time, which is convenient for hooking.



Art.No	Wire rope dia	Wire rope length	Webbing Material	Strength	CE
MD15-6	6.5mm	0.6m	Stainless steel	25kN	EN795 /EN354
MD15-8	6.5mm	0.8m	Stainless steel	25kN	
MD15-120	6.5mm	1.2m	Stainless steel	25kN	
MD15-150	6.5mm	1.5m	Stainless steel	25kN	





**HT-718L**  
Pedal rope (double hole)

- It is woven with high-strength Dyneema fiber, which is light and durable;
- The rope diameter is 6mm, and the rope core has zero slip;
- The stainless steel buckle can quickly adjust the length to ensure that the foot is always in the ring;
- It can be used to ascend with the hand-type ascending device;
- Used for high-altitude operations such as SRT, rescue, mountaineering, and rock climbing;



**HT-719**  
Five step aider

- The 5-step aid adopts the classic staggered triangular step structure.
- Step stiffeners ensure that the steps are always open



**HT-718**  
Pedal rope (double hole)

- It is woven with high-strength nylon fiber;
- The buckle can quickly adjust the length to ensure that the foot is always in the loop;
- It can be used to ascend with the hand-type ascending device;
- Used for high-altitude operations such as SRT, rescue, mountaineering, and rock climbing



**HT-722**  
Tool lanyard


- Combined with medium and high strength hook and elastic rope, it is light and easy to carry;
- Stretching length: 98~150cm;
- Maximum load: 7kg;



**HT-720**  
Trauma relief strap

Specially designed to help relieve the negative effects of suspension trauma, easy to attach to the harness with the help of the textile loop, allows the suspended worker to stand up in his harness to relieve pressure.


**Step to use trauma relief strap**

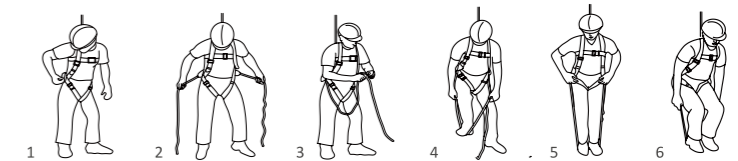

**HT-MD08**  
Horizontal Webbing Anchorage Line

The Anchorage Life Line made up of 30 mm Polyester Webbing equipped with the Ratchet Tensioner that allows easy tensioning of the lifeline between two structures. Both the ends are provided with Twist lock Steel Karabiners (Our Ref HT-R04). Once fitted, you can easily put back the extra webbing not deployed along the length, into the Bag Products according to EN 795.

Available Length- Total 20m, thus the user can use it for a length ranging from 5m to 20m. Once the Lifeline is fitted, the user can easily attach the Lanyard of his Harness to the Lifeline using a Karabiner. This allows movement along the length while keeping the user secured and safe at all times.

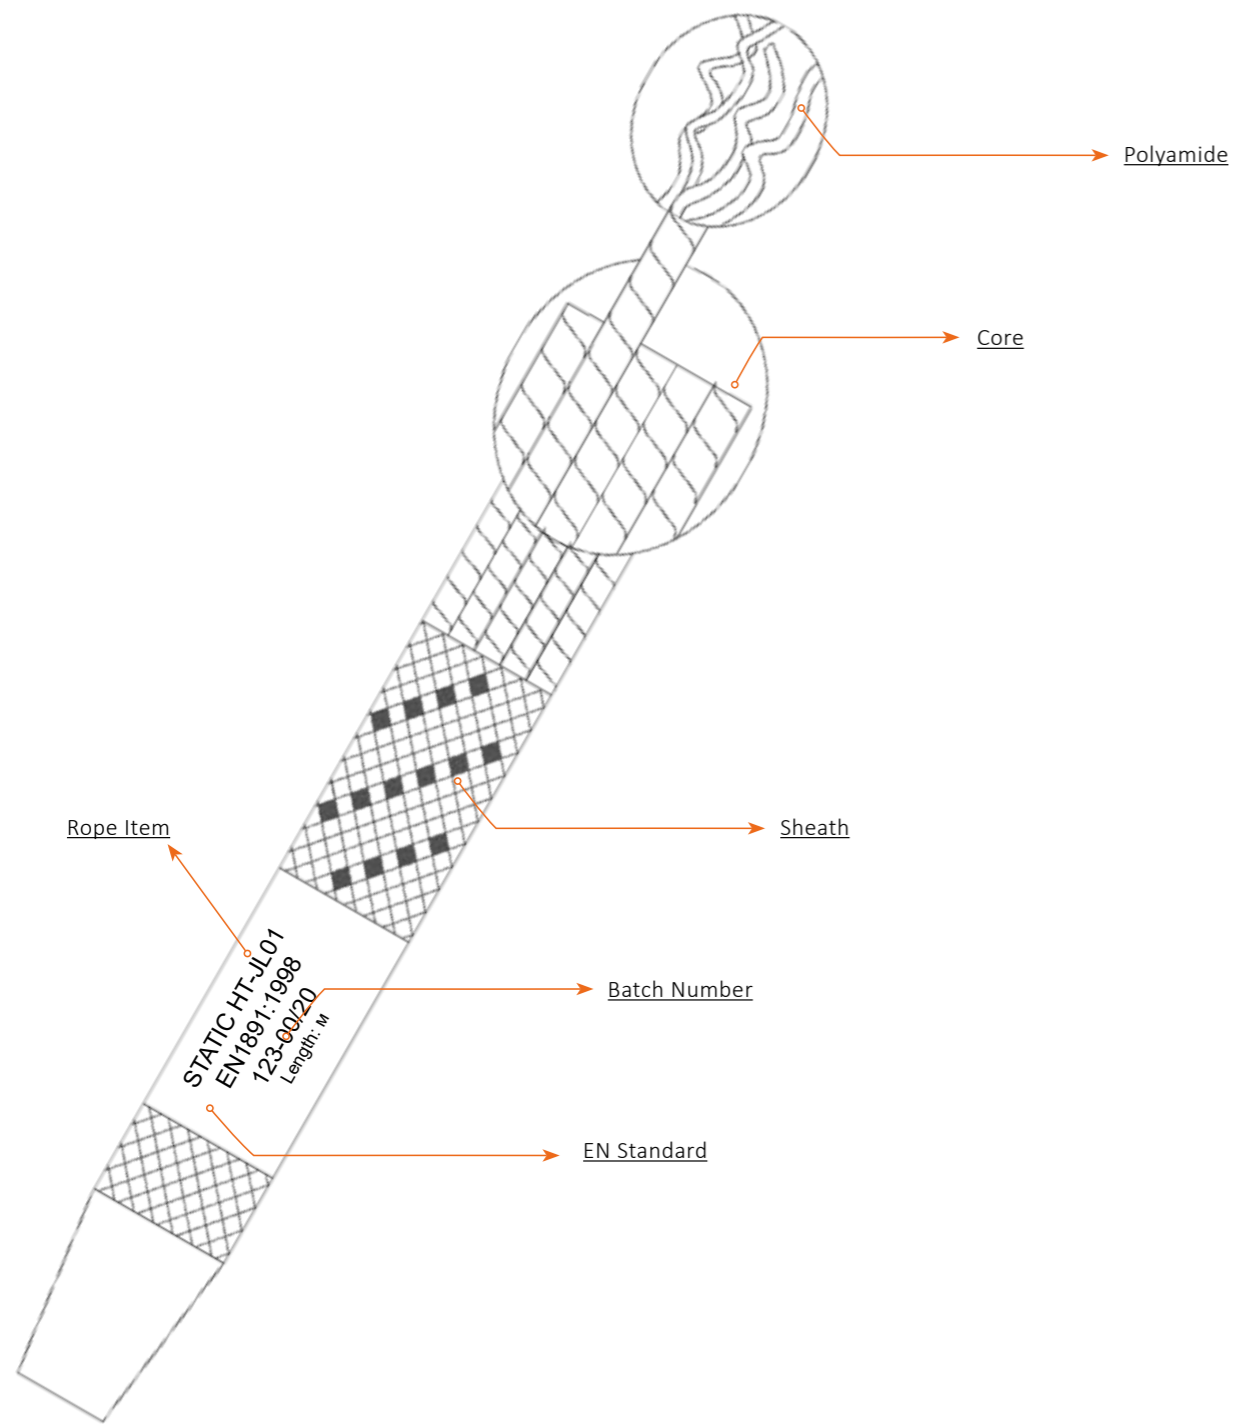

### DYNAMIC MOUNTAINEERING ROPE

- Comply with CE EN892 standard.
- It is especially suitable for rock climbing activities. This kind rope must be used during climbing when erecting a fixed protection point.
- It can absorb the strong impact of accidental fall through its own elasticity, these ropes are suitable for experts.
- Single ropes with a diameter of less than 10,5 mm are the most common products on the market today.

Type	Number of drop (coefficient 2)	Impact force (coefficient 2)	Dynamic extension (coefficient 2)	Static extension	Sheath slippage	Standard
Single rope	>5(85 kg)	<1200 daN	<40%	<10%	<20mm	EN892
Double rope	>5(55 kg)	<800 daN	<40%	<12%	<20 mm	
Pair rope	>12(80kg pair)	<1200 daN	<40%	<10%	<20 mm	

### SEMI-STATIC ROPE

- It is more accurately called a static rope or braided rope, and its rope sheath slippage coefficient is extremely small.
- It complies with CE EN1891 standard and is mainly used to enter, set up, or maintain a job position.
- Absolutely moderate ductility, these semi-static ropes can avoid bouncing up and down like bungee ropes when descending and hanging in the air.
- Safe and reliable, with a long service life, we promote easy-to-operate ropes, especially those with a diameter of 10,5 mm or 11 mm.

Type	Number of drop (coefficient 1)	Impact force (coefficient 0.3)	Static extension (50-150kg)	Static extension	8 bytes point static tension (within 3 minutes)	Sheath slippage	Standard
A	>5(100kg)	<600 daN	<5%	2200daN the min	1500daN	If diameter $\phi < 12\text{mm}$ , then $< 20 + 10(T - 9\text{mm})$ , If $12.1 < \phi < 16\text{mm}$ , then $< 20 + 5(\phi - 12\text{mm})$	EN1891
B	>5(80kg)	<600 daN	<5%	1800daN the min	1200daN	If diameter $\phi < 12\text{mm}$ then $< 20 + 10(\phi - 9\text{mm})$ , If $12.1 < \phi < 16\text{mm}$ , then $< 20 + 5(\phi - 12\text{mm})$	

### DYNAMIC MOUNTAINEERING ROPE

**Single rope**  
Single-strand use to connect climbers and protectors. Mountains, cliffs, and indoor activities.

**Double rope**  
Each rope can be locked separately for better application in mountain route climbing, long route climbing and ice climbing.

**Pair rope**  
At each protection point, two ropes must be locked for use at the same time. Used for mountain and ice climbing.

### SEMI-STATIC ROPE

**Type A rope**  
It can be used for movement and propulsion. This type of rope has the same excellent performance when used for ascent and descent. Used for cave exploration, canyoning, rope operations, safety or emergency operations.

**Type B rope**  
The diameter and strength are smaller than that of Type A rope, so please be more cautious when using it. Used for cave exploration, canyoning, rope operations, safety or emergency operations.

**C rope**  
The rope is suitable for use in the canyon. It can only be used to descend and use two ropes together. It is composed of polypropylene material and can float.



HT-JL011



HT-JL012



HT-JL01



HT-JL02



HT-JL03



HT-JL05



HT-DL011




HT-DL012



HT-F011



HT-F012



HT-FZ




HT-T01



**HT-JL011**  
Static rope 9




<b>Diameter</b>	9mm
<b>Static strength</b>	21kN
<b>Number of drops</b>	>5
<b>Fall arrest peak force</b>	4.3kN
<b>Elongation</b>	4.5%
<b>Material</b>	Polyamide



**HT-JL012**  
Static rope 10



<b>Diameter</b>	10mm
<b>Static strength</b>	26kN
<b>Number of drops</b>	>5
<b>Fall arrest peak force</b>	4.4 kN
<b>Elongation</b>	3.5%
<b>Material</b>	Polyamide






**HT-JL01**  
Static rope 10.5




Diameter	10.5mm
Static strength	29.5kN
Number of drops	>5
Fall arrest peak force	4.7 kN
Elongation	3.2%
Material	Polyamide



**HT-JL02**  
Static rope 11




Diameter	11mm
Static strength	30kN
Number of drops	>5
Fall arrest peak force	5.2kN
Elongation	3.4%
Material	Polyamide



**HT-JL03**  
Static rope 12



Diameter	12mm
Static strength	39kN
Number of drops	>5
Fall arrest peak force	4.8 kN
Elongation	2.6%
Material	Polyamide



**HT-JL05**  
Static rope 11.7



Diameter	11.7mm
Static strength	32kN
Number of drops	>5
Fall arrest peak force	5.5kN
Elongation	3%
Material	Polyamide






**HT-DL011**  
Dynamic rope 10.3



<b>Diameter</b>	10.3mm
<b>Number of drops</b>	8
<b>Fall arrest peak force</b>	9.1kN
<b>Knotability</b>	0.9
<b>Material</b>	Polyamide



**HT-DL012**  
Dynamic rope 9.8



<b>Diameter</b>	9.8mm
<b>Number of drops</b>	8
<b>Fall arrest peak force</b>	8.9kN
<b>Knotability</b>	0.9
<b>Material</b>	Polyamide



**HT-F011**  
Fire rope 9

<b>Diameter</b>	9mm
<b>Pull</b>	2800kgf
<b>Heat-resistant temperature:</b>	400 degrees
<b>Load-bearing</b>	100kg
<b>Heating time</b>	300 seconds without coking
<b>Material</b>	Aramid/Ployester



**HT-F012**  
Fire rope 10.5

<b>Diameter</b>	10.5mm
<b>Pull</b>	3500kgf
<b>Heat-resistant temperature:</b>	400 degrees
<b>Load-bearing</b>	136kg
<b>Heating time</b>	300 seconds without coking
<b>Material</b>	Aramid/Ployester





### HT-FZ

#### Accessory cord

Suitable for a multitude of used,meet EN564 standard

Art.No	Diameter	Material	Breaking Strength	Color
HT-FZ01	4mm	Polyamide	4.4kN	Orange
HT-FZ02	5mm	Polyamide	6.5kN	Red
HT-FZ03	6mm	Polyamide	8.1kN	Yellow
HT-FZ04	7mm	Polyamide	10kN	Blue
HT-FZ05	8mm	Polyamide	13.1kN	Green

### HT-T01

#### Rope protection

It is used to protect the rope and avoid the rough and sharp protrusions of the building such as corners and rocks from wearing the rope.

- PVC mesh material, double-layer structure is sturdy and wear-resistant, fully protect the rope to avoid abrasion, light weight, easy to carry;
- The velcro design of the unpacking port is convenient and quick to operate;
- Multiple specifications, used in different environments

Material	Size	Color
PVC mesh cloth	50cm, 70cm, 90cm, 120cm	Orange

### HT-T02

#### Rope protector

It is used to protect the rope and avoid the rough and sharp protrusions of the building such as corners and rocks from wearing the rope.

- Roll the casing to reduce friction; free combination, strong versatility;
- Light weight, easy to carry

Material	Specification	Weight	Length
304 stainless steel	11.2x5.5x2.8cm (single section)	115g/section	Links can be lengthened indefinitely



### HT-T03

#### Rope protector

It is used to protect the rope and avoid the rough and sharp protrusions of the building such as corners and rocks from wearing the rope.

- Roll the casing to reduce friction; free combination, strong versatility;
- Specific size calculation, effective protection for a variety of rope grinding sites
- The side plate is turned over to prevent it from turning over;

Material	Specification	Weight	Length
304 stainless steel	12.2x9.6x4cm (single section)	265g/section	Links can be lengthened indefinitely

### HT-T05

#### Rope Protector

- PU coating, thick fabric, good waterproof and windproof effect;
- The four corners have webbing to fix the rope end, which can quickly arrange the rope;
- Moderate size, more convenient to carry;

Material	Size	Weight	Color
Polyester with PU coating	130x130cm	195g	grey




### HT-731

#### Triangle rescue belt

- Universal triangle rescue belt, with 5 sets of adjustment points in different positions;
- Equipped with a shoulder strap, which can be worn quickly;
- Used for all kinds of rescue, convenient and quick;



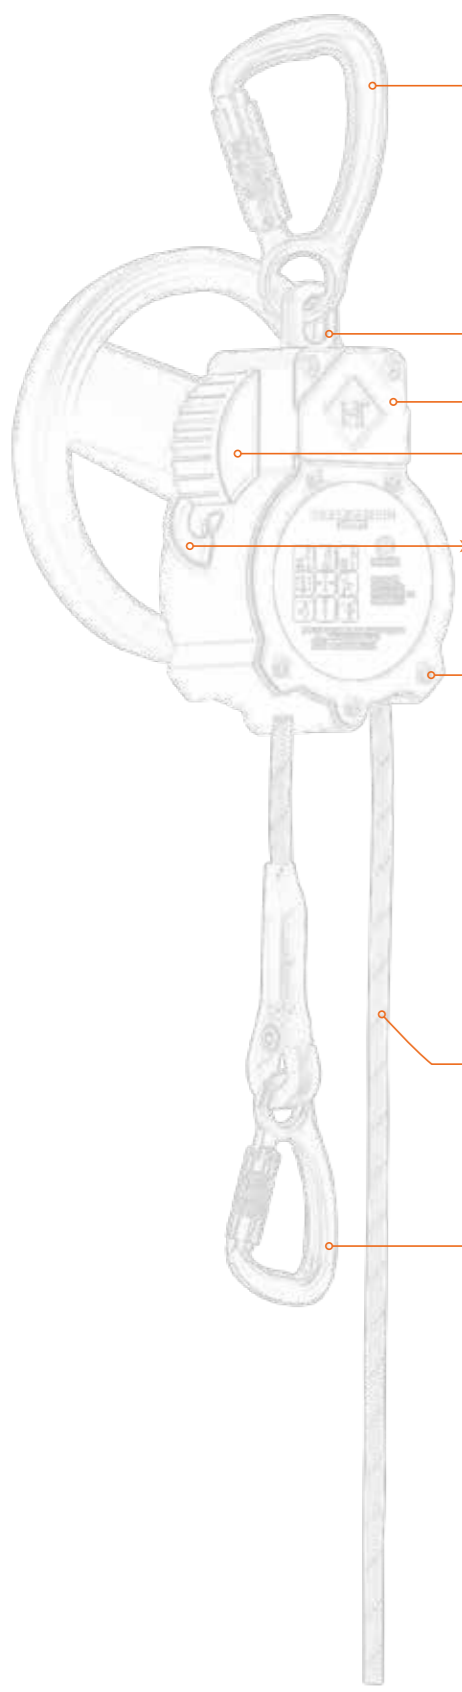

Life-saving self-locking spring hook, in line with EN362;

Anchor point, good adaptability in dark environment;

Aluminum alloy shell, lightweight, lightweight and durable, good heat dissipation performance;

Double brakes increase safety and make use more assured;

Integrated rope for more effective control of the descent speed during rescue;

The two-way wheel hub, when one end of the hook rises, the other end falls, and after the descending escape is completed, you can immediately start descending and escape again;

9.6mm static rope, super tough and wear-resistant;

Life-saving self-locking spring hook, in line with EN362;

**Various lengths of 15m~150m are available;  
Can carry 2 people,**

Descent height:  
140kg for a single person, with a maximum descending height of 500m;  
250kg for two persons, the maximum descent height is 175m;



**HT-MD07**  
**Rescue descent**

- Aluminum alloy shell, lightweight, lightweight and durable, good heat dissipation performance;
- High-performance and easy-to-operate winch;
- Double brakes increase safety and make use more assured;
- Integrated lugs for more effective control of the descent speed during rescue;
- The two-way wheel hub, when one end of the hook rises, the other end falls, and after the descending escape is completed, you can immediately start descending and escape again;
- 9.6mm static rope, super tough and wear-resistant;
- Life-saving self-locking spring hook, in line with EN362;
- Descent height:  
140kg for a single person, using the maximum descending height of 500m,  
250kg for two persons, the maximum descent height is 175m;
- Descent speed: 0.85m/s
- Rope type: static rope EN1891 type A
- Rope strength: 25kN
- The descending device is configured on the lifting work platform and is used for wind power towers, cable cars, derricks, etc., for emergency rescue operations, and can also be used for rescuers in harsh environments;

<b>RFF.</b>	HT-MD780	HT-MD7100	HT-MD7120	HT-MD7150
<b>Length</b>	80m	100m	120m	150m
<b>CE</b>	EN341:2011,class A			




**HT-MD06**  
**Rescue descent**

- Aluminum alloy shell, lightweight, lightweight and durable, good heat dissipation performance;
- Double brakes increase safety and make use more assured;
- Integrated lugs for more effective control of the descent speed during rescue;
- The two-way wheel hub, when one end of the hook rises, the other end falls, and after the descending escape is completed, you can immediately start descending and escape again;
- 9.6mm static rope, super tough and wear-resistant;
- Life-saving self-locking spring hook, in line with EN362;
- Descent height:  
140kg for a single person, using the maximum descending height of 500m,  
250kg for two persons, the maximum descent height is 175m;
- Descent speed: 0.85m/s
- Rope type: static rope EN1891 type A
- Rope strength: 25kN
- The descending device is configured on the lifting work platform and is used for wind power towers, cable cars, derricks, etc., for emergency rescue operations, and can also be used for rescuers in harsh environments;

<b>RFF.</b>	HT-MD680	HT-MD6100	HT-MD6120	HT-MD6150
<b>Length</b>	80m	100m	120m	150m
<b>CE</b>	EN341:2011,class A			



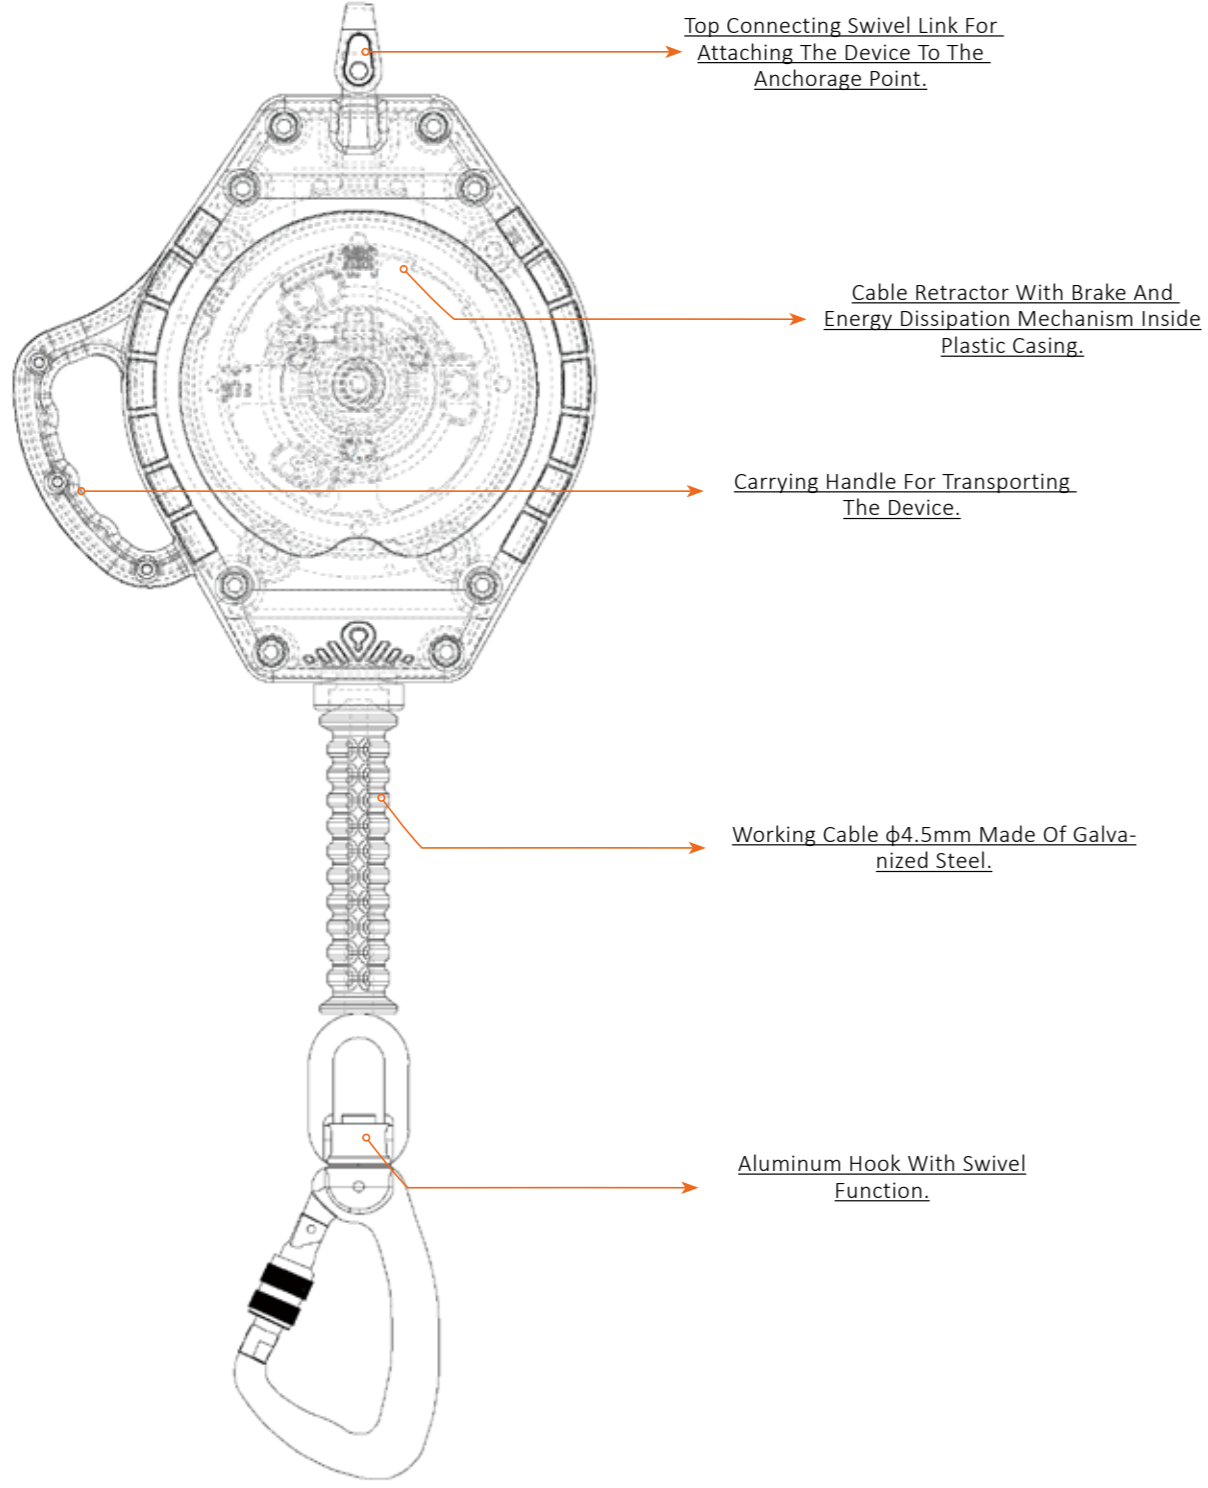

HT-W02



HT-W02L



HT-W02Y



HT-W02YL



HT-W03



HT-W06



HT-W10



HT-C03



HT-C06



HT-C10



HT-C15/ HT-C20



### HT-W02

Webbing fall arrester with energy absorber

Webbing Length	Webbing Width	Webbing Strength	Max Load	Cover Material	Color	CE
1.8m	20mm	15kN	100kg	PA	Black	EN360:2002



### HT-W02L

Webbing fall arrester with energy absorber

Webbing Length	Webbing Width	Webbing Strength	Max Load	Cover Material	Color	CE
1.8m	20mm	15kN	100kg	PA	Black	EN360:2002



### HT-W02Y

Webbing fall arrester with energy absorber

Webbing Length	Webbing Width	Webbing Strength	Max Load	Cover Material	Color	CE
1.8m	20mm	15kN	100kg	PA	Black	EN360:2002



### HT-W02YL

Webbing fall arrester with energy absorber

Webbing Length	Webbing Width	Webbing Strength	Max Load	Cover Material	Color	CE
1.8m	20mm	15kN	100kg	PA	Black	EN360:2002



### HT-W03

Webbing fall arrester

Webbing Length	Webbing Width	Webbing Strength	Max Load	Cover Material	Color	CE
3m	20mm	15kN	100kg	PA	Black	EN360:2002



### HT-W06

Webbing fall arrester

Webbing Length	Webbing Width	Webbing Strength	Max Load	Cover Material	Color	CE
6m	25mm	15kN	100kg	PA	Black	EN360:2002



### HT-W10

Webbing fall arrester

Webbing Length	Webbing Width	Webbing Strength	Max Load	Cover Material	Color	CE
10m	25mm	15kN	100kg	PA	Black	EN360:2002



**HT-C03**  
Steel wire rope fall arrester

Steel Wire Length	Steel Wire Dia	Steel Wire Strength	Max Load	Cover Material	Color	CE
3m	4.5mm	12kN	100kg	PA	Black	EN360:2002



**HT-C06**  
Steel wire rope fall arrester

Steel Wire Length	Steel Wire Dia	Steel Wire Strength	Max Load	Cover Material	Color	CE
6m	4.5mm	12kN	100kg	PA	Black	EN360:2002



**HT-C10**  
Steel wire rope fall arrester


Steel Wire Length	Steel Wire Dia	Steel Wire Strength	Max Load	Cover Material	Color	CE
10m	4.5mm	12kN	100kg	PA	Black	EN360:2002



**HT-C15/ HT-C20**  
Steel wire rope fall arrester

Steel Wire Length	Steel Wire Dia	Steel Wire Strength	Max Load	Cover Material	Color	CE
15m	4.5mm	12kN	100kg	PA	Black	EN360:2002
20m	4.5mm	12kN	100kg	PA	Black	EN360:2002



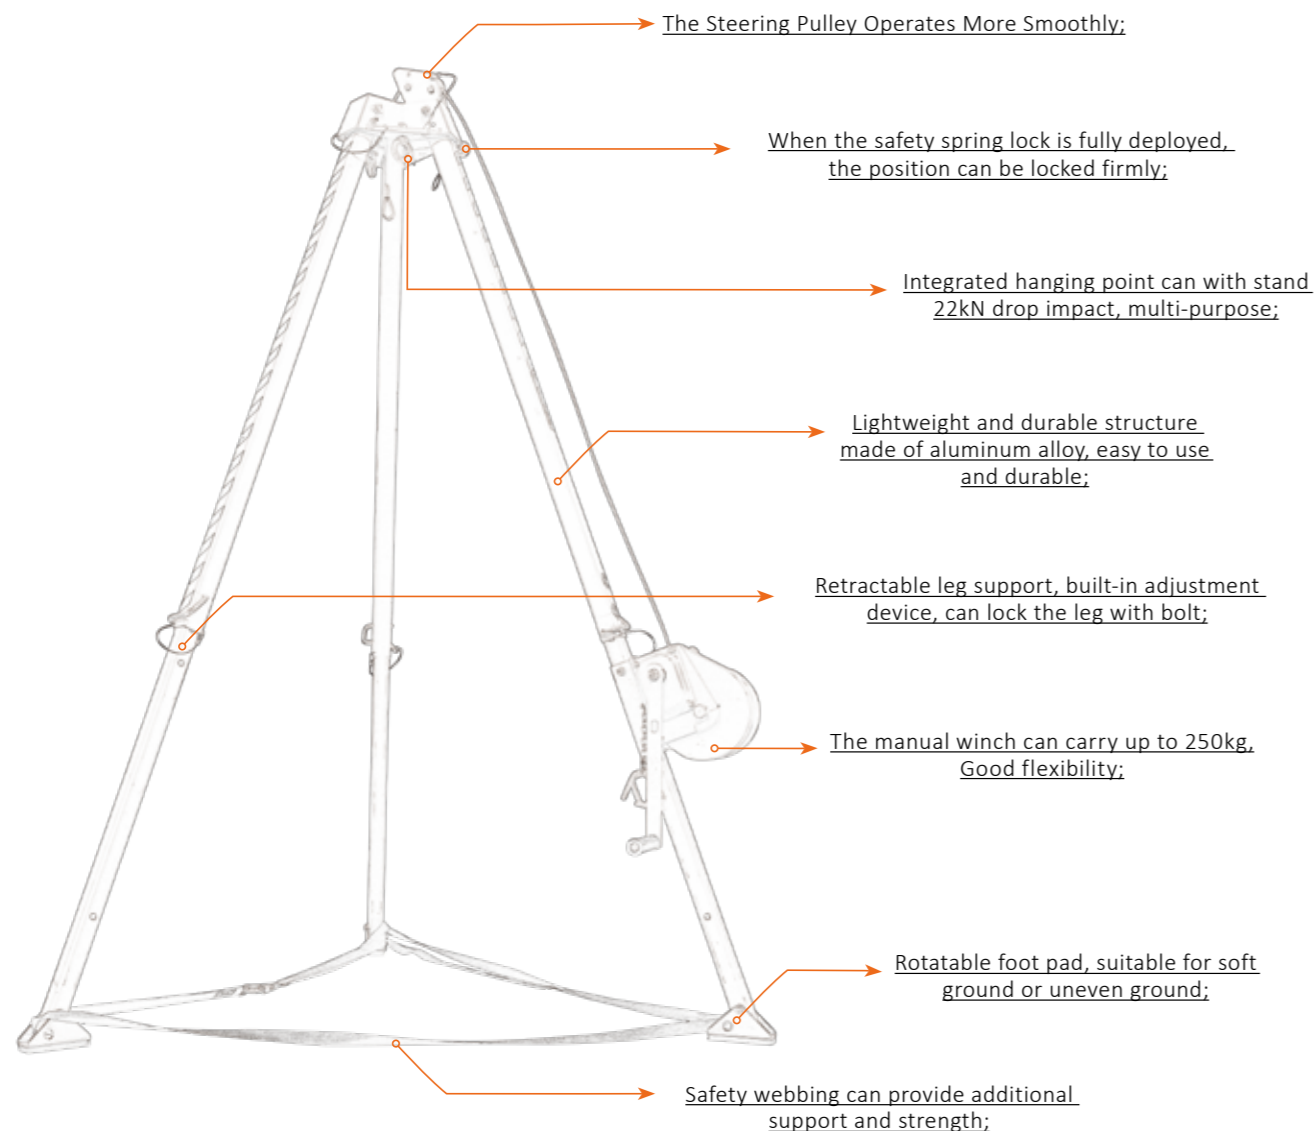

### HT-901

#### Rescue tripod

For access in confined spaces. With two mounted pulleys at the head of the Tripod in the prolongation of the main leg for passing a cable. Having two auxiliary eye bolts as attachment points. Aluminium alloy cast head, legs in Aluminium. Steel support-shoes provided with rubber sole to increase friction and impart more stability.

Adjustable Height	1.15m to 2.15m
Wheelbase Footprint	1.8m Diameter
Weight	12.15kg
Max Load Capacity:	500kg
CE	EN795:2012



### HT-902

#### Rescue tripod with winch

The rescue tripod consists of main parts, sling, capstan, and protection chains. Be made of durable super light aluminum alloy, adjustable legs, safety factor more than 10. Automatic lock capstan for rising and falling, to protects sling work. The cable of sling is made of stainless steel, good tenacity and rust proof. Convenient combination is suitable to fix at the well and pit mouth. Out of limit of the ground unevenness.

Adjustable Height	1.15m to 2.15m
Wheelbase Footprint	1.8m Diameter
Winch Wirerope	20m/30m
Max Load Capacity	500kg
Packing Size	175*25*25cm
Weight	≤30kg
CE	EN795:2012





### HT-905 Rescue tripod

For access in confined spaces. With two mounted pulleys at the head of the Tripod in the prolongation of the main leg for passing a cable. Having two auxiliary eye bolts as attachment points. Aluminium alloy cast head, legs in Aluminium. Steel support-shoes provided with rubber sole to increase friction and impart more stability.

Adjustable Height	1.15m to 2.15m
Wheelbase Footprint	1.8m Diameter
Weight	12.15kg
Max Load Capacity:	500kg
CE	EN795:2012



### HT-906 Rescue tripod with winch

The rescue tripod consists of main parts, sling, capstan, and protection chains. Be made of durable super light aluminum alloy, adjustable legs, safety factor more than 10. Automatic lock capstan for rising and falling, to protects sling work. The cable of sling is made of stainless steel, good tenacity and rust proof. Convenient combination is suitable to fix at the well and pit mouth. Out of limit of the ground unevenness.

Adjustable Height	1.15m to 2.15m
Wheelbase Footprint	1.8m Diameter
Winch Wire rope	20m/30m
Max Load Capacity	500kg
Packing Size	175*25*25cm
Weight	≤30kg
CE	EN795:2012



### HT-MD01 Track anchor devices

Designed for fall protection and rope access work positioning. The clamps attach without tools to construction girders either overhead or underfoot.

Material	Weight	Min breaking Strength	Girders Width	CE
AL	2.3kg	23kN	76-300mm	EN 795



### HT-MD02 Track anchor devices

Designed for fall protection and rope access work positioning. The clamps attach without tools to construction girders either overhead or underfoot. Suitable for working occasions in linear area or continuous annular working area.

Material	Weight	Min breaking Strength	Girders Width	CE
AL	3.5kg	22.3kN	76-300mm	EN 795



### Stainless steel hanger plates

Stainless steel hanger plates and bolts for permanent anchor points. Available in 2 different bolt sizes.

Art No.	Material	Diameter	Strength
HT-MD03-A	Stainless Steel	10mm	25kN
HT-MD04-A		12mm	30kN



### Bolt

Stainless steel hanger plates and bolts for permanent anchor points. Available in 2 different bolt sizes.

Art No.	Material	Diameter	Length
HT-MD03-B	Stainless Steel	10mm	90mm
HT-MD04-B		12mm	110mm



### Anchor kit

Art No.	Material	Diameter
HT-MD03	Stainless Steel	10mm
HT-MD04		12mm



HT-A01



HT-A02



HT-A03



HT-A04



HT-K01



HT-K02



HT-G01



HT-N03



HT-N01



HT-N02



HT-G03



HT-G02



HT-G05



HT-G06



HT-717L



HT-717R



**HT-A01**

Hand ascender  
Left hand

Material :AL  
Rope dia :9-12mm  
Strength :4kN  
Color :orange  
Weight :250g  
CE :EN567:2013  
EN12841:2006 - type B



**HT-A02**

Hand ascender  
Right hand

Material :AL  
Rope dia :9-12mm  
Strength :4kN  
Color :orange  
Weight :250g  
CE :EN567:2013  
EN12841:2006 - type B



**HT-A03**

Chest ascender

Material :AL  
Rope dia :9-12mm  
Strength :4kN  
Color :orange  
Weight :160g  
CE :EN567:2013



**HT-A04**

Manually operated  
Descender device

Rope dia :9-12mm  
Strength :2kN  
Color :orange  
Weight :340g  
CE :EN12841:2006 - type C  
EN341:2010





**HT-K01**

8 Figure

**Material** :AL  
**Rope Dia** :8-13mm  
**Strength** :30kN  
**Color** :orange  
**Weight** :146g  
**CE** :EN15151-2:2013



**HT-K02**

8 Figure

**Material** :AL  
**Rope Dia** :8-13mm  
**Strength** :40kN  
**Color** :orange  
**Weight** :252g  
**CE** :EN15151-2:2013



**HT-G01**

Belay Device

**Material** :AL  
**Rope Dia** :8-11mm  
**Strength** :25kN  
**Color** :orange  
**Weight** :70g  
**CE** :EN15151-2:2013



**HT-N03**

Innovanted rotating anchor

**Material** :AL  
**Strength** :30kN  
**Color** :orange  
**Weight** :165g  
**CE** :EN354:2010



**HT-N01**

Rigging plated 1/3

**Material** :AL  
**Strength** :36kN  
**Color** :orange  
**Weight** :62g



**HT-N02**

Rigging plated 3/5

**Material** :AL  
**Strength** :35kN  
**Color** :Black  
**Weight** :150g



**HT-G03**

Rope Grab

**Material** :AL  
**Rope Dia** :10-12mm  
**Strength** :2kN  
**Color** :orange  
**Weight** :170g  
**CE** :EN353-2:2002  
 ,EN12841:2006 - type A



**HT-G02**

Rope Grab

**Material** :AL  
**Rope Dia** :8-12mm  
**Strength** :2kN  
**Color** :orange  
**Weight** :220g  
**CE** :EN353-2:2002



**HT-G05**

Rope grab

**Material** :Steel  
**Rope Dia** :14-16mm  
**Weight** :265g  
**CE** :EN353-2:2002



**HT-G06**

Rope grab

**Material** :Steel  
**Rope Dia** :8/10mm  
**Weight** :493g  
**CE** :EN353-1:2014



**HT-717L**

Foot ascender  
Left foot

**Material** :AL  
**Rope Dia** :8-13mm  
**Color** :orange  
**Weight** :125g



**HT-717R**

Foot ascender  
Right foot

**Material** :AL  
**Rope Dia** :8-13mm  
**Color** :grey  
**Weight** :125g



**HT-P06**

Universal pulley

Material : 7075  
 Diameter : <12mm  
 Strength : 24kN  
 Color : orange  
 CE : EN12278:2007



**HT-P07**

Universal pulley

Material : 7075  
 Diameter : <12mm  
 Strength : 24kN  
 Color : orange  
 CE : EN12278:2007



**HT-P01**

Single pulley

Material : AL  
 Rope dia : <15 mm  
 Strength : 24kN  
 Color : Orange  
 CE : EN12278:2007



**HT-P03**

Single pulley

Material : AL  
 Rope dia : <15mm  
 Strength : 30kN  
 Color : Orange  
 CE : EN12278:2007



**HT-P04**

Double pulley

Material : AL  
 Rope dia : <15 mm  
 Strength : 30kN  
 Color : Orange  
 CE : EN12278:2007



**HT-P05**

Double pulley

Material : AL  
 Rope dia : <14mm  
 Strength : 24kN  
 Color : Orange  
 CE : EN12278:2007



HT-R01



HT-R01T



HT-R02



HT-R03



HT-R04T



HT-R04



HT-R04S



HT-R05T



HT-R05



HT-R06T



HT-R06



HT-R15T



HT-R15



HT-R15S



HT-R17T



HT-R17



HT-R17S



HT-H14



HT-H18



HT-H19



HT-H03



HT-X05



HT-H08



**HT-R01**

**Lock system** : Screwlock  
**Material** : ST  
**Diameter** : 8mm  
**Gate open** : 10.5mm  
**Strength** : 26kN  
**CE** : EN362: 2004-Q



**HT-R01T**

**Lock system** : Screwlock  
**Material** : ST  
**Diameter** : 8mm  
**Gate open** : 11mm  
**Strength** : 27kN  
**CE** : EN362: 2004-Q



**HT-R02**

**Lock system** : Screwlock  
**Material** : ST  
**Gate open** : 20mm  
**Strength** : 25kN  
**CE** : EN362: 2004-B



**HT-R03**

**Lock system** : Twistlock  
**Material** : ST  
**Gate open** : 17mm  
**Strength** : 23kN  
**CE** : EN362: 2004-B

Triactlock system



**HT-R04T**

**Lock system** : Screwlock  
**Material** : ST  
**Gate open** : 26mm  
**Strength** : 35kN  
**CE** : EN362: 2004-B



**HT-R04**


**Lock system** : Twistlock  
**Material** : ST  
**Gate open** : 26mm  
**Strength** : 35kN  
**CE** : EN362: 2004-B




**HT-R04S**

**Lock system** : Triactlock  
**Material** : ST  
**Gate open** : 26mm  
**Strength** : 35kN  
**CE** : EN362: 2004-B



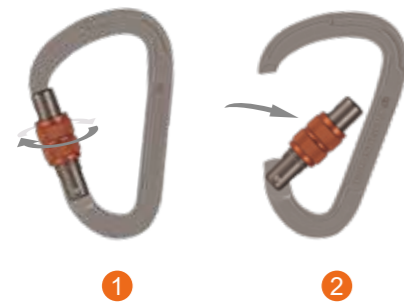

Screwlock system

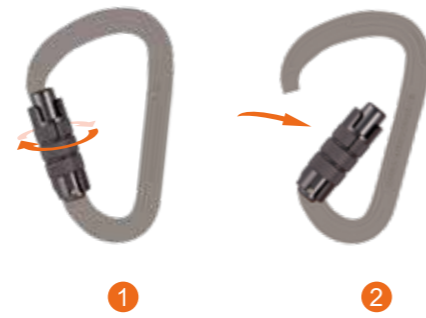

Twistlock system



**HT-R05T**

Lock system : Screwlock  
 Material : AL  
 Gate open : 19mm  
 Strength : 25kN  
 CE : EN362: 2004-B



**HT-R06T**

Lock system : Screwlock  
 Material : AL  
 Gate open : 24mm  
 Strength : 23kN  
 CE : EN362: 2004-B



**HT-R05**

Lock system : Twistlock  
 Material : AL  
 Gate open : 19mm  
 Strength : 25kN  
 CE : EN362: 2004-B



**HT-R06**

Lock system : Twistlock  
 Material : AL  
 Gate open : 24mm  
 Strength : 23kN  
 CE : EN362: 2004-B

Triactlock system



**HT-R15T**

Lock system : Screwlock  
 Material : AL  
 Gate open : 22mm  
 Strength : 35kN  
 CE : EN362: 2004-B



**HT-R17T**

Lock system : Screwlock  
 Material : AL  
 Gate open : 26mm  
 Strength : 26kN  
 CE : EN362: 2004-B



**HT-R15**

Lock system : Twistlock  
 Material : AL  
 Gate open : 22mm  
 Strength : 35kN  
 CE : EN362: 2004-B



**HT-R17**

Lock system : Twistlock  
 Material : AL  
 Gate open : 26mm  
 Strength : 26kN  
 CE : EN362: 2004-B



**HT-R15S**

Lock system : Triactlock  
 Material : AL  
 Gate open : 22mm  
 Strength : 35kN  
 CE : EN362: 2004-B



**HT-R17S**

Lock system : Triactlock  
 Material : AL  
 Gate open : 26mm  
 Strength : 26kN  
 CE : EN362: 2004-B



**HT-H14**

**Material** : Steel  
**Gate open** : 17mm  
**Strength** : 23kN  
**Weight** : 200g  
**CE** : EN362: 2004-T



**HT-H18**

**Material** : AL  
**Gate open** : 25mm  
**Strength** : 40kN  
**Weight** : 125g  
**CE** : EN362: 2004-T



**HT-H19**

**Material** : AL  
**Gate open** : 22mm  
**Strength** : 28kN  
**Weight** : 165g  
**CE** : EN362: 2004-T



**HT-H03**

**Material** : Steel  
**Gate open** : 55mm  
**Strength** : 25kN  
**Weight** : 470g  
**CE** : EN362: 2004-A



**HT-X05**

**Material** : AL  
**Gate open** : 61mm  
**Strength** : 25kN  
**Weight** : 460g  
**CE** : EN362: 2004-A




**HT-H08**


**Material** : AL  
**Gate open** : 105mm  
**Strength** : 23kN  
**Weight** : 895g  
**CE** : EN362: 2004-A




HT-18601




HT-18602



HT-18603



HT-18604



HT-18605

White	Black	Orange	Blue	Yellow
HT-18601	HT-18602	HT-18603	HT-18604	HT-18605

**Special features:**

- This helmet is a comfortable industrial helmet, very light;
- With 17 ventilation holes, it can make the head air flow more smoothly;
- The inner lining is made of EPP (expanded polypropylene) and EPS (expanded polystyrene) materials;
- Adjustable chin strap, allowing self-adjustment of strength, very suitable for working on high places and on the ground;
- This multifunctional helmet has the following characteristics:
  - 1.Side-fixing system goggles
  - 2.Headlights with elastic headwear
  - 3.Hearing protection device;
- The helmet is suitable for different environments, working at height (EN 12492) or working on the ground (EN 397);
- The size is suitable for people with a head circumference of 56~62 cm;



### HT-18710

#### Visor

- Main characteristics:
- Polycarbonate technical visor compatible with Work
  - Full protection from fragments of ice, snow, etc.
  - Anti-scratch treatment outside
  - Available in transparent



### HT-1870

#### Half-finger gloves

- Used for rope rescue and daily climbing training
- The palm is made of goat head leather, which is soft and wear-resistant.
  - Double-layer anti-wear reinforcement for palm, index finger, and thumb working parts, and yellow wear-resistant aramid thread for strong sewing
  - The back of the hand is made of stretch polyester fabric, and the fingers can bend freely and work flexibly.
  - The wrist has a symmetrical 17mm keyhole, which is convenient for hanging on the seat belt with a lock and easy to use.

Material: Goatskin, Polyester, Neoprene, Lycra

Size: M/L/XL



### HT-1871

#### Full-finger gloves

- Used for rope rescue and daily climbing training
- The palm is made of goat head leather, which is soft and wear-resistant.
  - Double-layer anti-wear reinforcement for palm, index finger, and thumb working parts, and yellow wear-resistant aramid thread for strong sewing
  - The back of the hand is made of stretch polyester fabric, and the fingers can bend freely and work flexibly.
  - The wrist has a symmetrical 17mm keyhole, which is convenient for hanging on the seat belt with a lock and easy to use.
  - Suitable for use with seat belts and small items

Material: Goatskin, Polyester, Neoprene, Lycra

Size: M/L/XL



### HT-B01

#### Bag 2L

- The cloth bag uses a Velcro device, which is convenient to open and close the bag
- Suitable for use with seat belts and small items

Material	Size	Weight	Color
500D Oxford cloth	15x8x21cm	95g	Black



### HT-B02

#### Bag

- Easy to open and close drawstring bag
- Suitable for use with seat belts and small items

Size	Weight	Color
38*28cm	40g	Black

### HT-B03

#### Rope bag (caving/tracing the river) 45L

- PVC mesh (1000D), high-frequency compression, strong and wear-resistant; the thickened waist belt and shoulder strap are more suitable for users to carry on long distances;
- Built-in ID card slot cover, reduce the direct impact of running water on the bag mouth, strengthen the waterproof performance, and reduce the hooking when crossing complex road sections;
- Fabric environmental protection



Material	Size	Weight	Color
1000D PVC	35X55cm	1500g	orange black





**HT-B05**

**Rope bag (caving) 35L/60L**

- PVC mesh (1000D), high-frequency compression, strong and wear-resistant; soft and comfortable; special pocket fasteners, help to open and close the pocket quickly;
- Moderate size, PVC barrel design, taking into account different purposes, the body of the bag has multiple hanging points, which can be transported and lifted;
- Fabric environmental protection



**HT-B06**

**Rope bag (caving) 25L/35L**

- PVC mesh (1000D), high-frequency compression, strong and wear-resistant; the backpack is padded, and the thickened waist belt and shoulder strap are more suitable for users to carry on long distances;
- Moderate size, PVC bucket design, taking into account different purposes, the bag is equipped with multiple hanging points can be lifted and lifted;
- Fabric environmental protection



**HT-1970**

**Stretcher**

- The stretcher is made of stainless steel tube (carbon steel) and net, which will not cause additional damage to the patient, and is stronger than ordinary stretchers;
  - The back is equipped with foam pads, net linings, and safety belts;
  - The stretcher is equipped with adjustable foot safety mechanism;
  - The stretcher is equipped with 4 slings for easy suspension and disassembly;
  - Thread connection, bottom pin type connection structure, can realize quick disassembly and assembly;
  - Split structure to achieve more convenience for storage and transportation;
  - This product can be used in a variety of angle environments such as vertical, translation, and slope;
- The structure of this rescue stretcher focuses on the particularity of first aid, such as rugged mountainous, air or sea rescue; the frame is sturdy and durable, and the simple and reliable device allows the operator to take first aid measures safely and quickly;

Material: stainless steel, polyester	Weight: 17kg
Color: silver	Loading capacity: 350kg
Size: 219*63*27cm	



**HT-1971**

**Stretcher**

- The stretcher is made of non-toxic and non-polluting PE material, which has the functions of fire prevention, abrasion resistance and corrosion resistance;
- The stretcher is equipped with adjustable foot safety mechanism;
- The plastic bottom foam cushion provides comfortable support for the injured back;
- The stretcher is equipped with 4 slings for easy suspension and disassembly;
- Split structure to achieve more convenience for storage and transportation;
- This product can be used in a variety of angle environments such as vertical, translation, and slope;
- The structure of this rescue stretcher focuses on the particularity of first aid, such as rugged mountainous, air or sea rescue; the durable frame, simple and reliable device allows operators to take first aid measures safely and quickly.

Material: PE	Weight: 21kg
Color: Orange	Loading capacity: 300kg
Size: 218*62*18cm	



### HT-1972

#### Stretcher

- Attach the rope to the traction rope with the carabiner;
- The stretcher is equipped with 4 slings for easy suspension and disassembly;
- The roll structure provides more convenience for storage and transportation to adapt to irregular or narrow terrain;
- This product can be used in a variety of angle environments such as vertical, translation, and slope;
- This roll stretcher can be installed in a 45L backpack to reduce the difficulty of carrying during the journey;
- This rescue stretcher is suitable for all rope rescue techniques, especially in confined spaces;

Material: Nylon	Weight: 3kg
Color: orange	Size: 82*71cm

### HT-1973

#### Stretcher Board

- This stretcher board is made of PE material, which is non-release and pollution-free, strong and durable,
- X-ray transmission is available;
- The stretcher is equipped with a safety belt;
- The stretcher can be used in combination with the head holder;
- The simple and reliable device allows operators to take first aid measures safely and quickly;



Material: PE	Weight: 6.5kg
Color: Orange	Loading capacity: 159kg
Size: 186*41*5cm	

### HT-1975

#### Head Holder

- This head holder is supported by high-density plastic, with two ear holes on both sides;
- Can be used with a slat stretcher;
- This head holder is waterproof, easy to clean, and anti-virus infection;



Material: Plastic	Weight: 1kg
Color: Red	Size: 40*26*16cm



### HT-S05

- Harness** : HT-311
- Fall Arrest** : HT-W02
- Sling** : HT-MD07-60
- Bag** : HT-B05



### HT-S06

- Harness** : HT-321
- Work position lanyard** : HT-613
- Sling** : HT-MD07-60
- Carabiner** : HT-R06
- Energy absorber lanyard** : HT-509YL
- Bag** : HT-B05





**HT-S02**

- Harness** : HT-315
- Flexible anchor line** : HT-615
- Sling** : HT-MD07-60
- Gloves** : HT-1871
- Bag** : HT-B05



**HT-S04**

- Harness** : HT-316T
- Static lanyard** : HT-623
- Flexible anchor line** : HT-615
- Energy absorber lanyard** : HT-509YL
- Sling** : HT-MD07-60
- Carabiner** : HT-R06
- Gloves** : HT-1871
- Bag** : HT-B05

# International quality certification

